


U2

Rugged Wearable

Unleash new possibilities




Ergonomic



Light



Durable

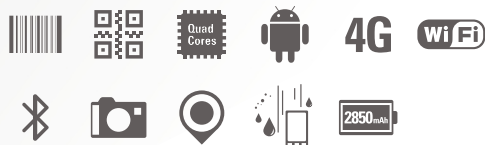

Hands-free operation

Performing a scanning operation is easier than lifting a finger, literally. With this new rugged wearable, not only work efficiency is improved, but the user comfort experience is also greatly enhanced

Optional ring scanner

1D and 2D scan engine, both with wired and wireless option are available

Fast data connectivity

Supports 4G and 3G cellular radio, and 802.11a /b/g/n WiFi, and Bluetooth

Rugged design and reliability

The U2 is drop tested with 1.5m and the sealing is tested with IP65 standard

<http://www.urovo.com/en>



UROVO U2 Specification

Basic Characteristics	O.S	Android 7.1		
	CPU	Quad-Core 1.2GHz		
	Display	4.0 inch TFT-LCD WVGA (480×800) color screen		
	Panel	Support Multiple finger touch, gloves touch.		
	RAM	2GB		
	ROM	16GB		
	Dimensions	118mm×91mm×33mm		
	Weight	273g (Included battery and wristband)		
	Buttons	Context Button, Home Button, Back Button, 2 User definable buttons (F1, F2) , Button, power button		
Power	Main Battery	Rechargeable 3.8V 2850 mAh		
	Charging time	No more than 4 hours		
	RTC Battery	Real time clock battery		
Radio Communication	Wi-Fi	802.11 a/b/g/n wireless communication		
	Bluetooth	Bluetooth 4.0 HS low energy		
	Chinese version	4G	TDD-LTE:Band 38/39/40/41; FDD-LTE:Band 1/3	
		3G	UMTS(WCDMA)/HSPA+/DC-HSDPA:850/900/2100MHz	
		2G	GSM/EDGE:850/900/1800MHz	
International Version	4G	FDD-LTE:Band1/2/3/4/5/7/8/20/28A/28B		
	3G	UMTS(WCDMA)/HSPA+/DC-HSDPA:850/900/1900/2100MHz		
	2G	GSM/EDGE:850/900/1800/1900MHz		
Expansion and peripherals	Camera	8MP camera with LED flash and auto-focus function; Support camera scanning		
	GPS	GPS, A-GPS, BDS		
	Slot	Micro SD/TF, Micro SIM		
	Interfaces	3.5mm Audio port, Magnetic pogo pin (With USB and charging functions, Support wired scanner)		
Accessories	Audio	Loudspeaker, Microphone		
	Standard Accessories	Power adaptor, USB-Magnetic pogo pin data cable, Instructions, Wristband		
	Optional Accessories	Battery charger, ring scanner		
User Environment	Operating Temperature	-10~50℃		
	Storage Temperature	-20~70℃		
	Humidity	5% ~ 95% (non condensing)		
	Drop Durability	1.5m		
	IP	IP65		



Urovo Technology Corporation Limited

For more information, please visit <http://www.urovo.com/en>

For purchasing or partnership enquiry, please +86 755-22673926 urovo@urovo.com